



Model	COM	Ethernet	Monitoring	Alarm	Data Record	Validity	WIFI / 4G	Pass-through	Script
V-BOX H-00	4 in 3	3	300	200	50	90 days / 1 millions	N/A	Serial / WVPN	Yes
V-BOX H-4G	4 in 3	3	500	300	100	180 days / 1 millions	4G	Serial / WVPN	Yes
V-BOX H-AG (global)	4 in 3	3	600	300	100	180 days / 1 millions	4G	Serial / WVPN	Yes
V-BOX H-WF	4 in 3	3	300	200	50	90 days / 1 millions	WIFI	Serial / WVPN	Yes

SPECIFICATIONS

Items	V-BOX H-00	V-BOX H-4G	V-BOX H-AG	V-BOX H-WF
OS	Linux			
CPU	Cortex A7			
Flash	128MB			
RAM	DDRIII 128MB			
SD Card	N/A			
MICRO USB	USB Host/Device : USB OTG Switch			
Serial Port	COM1 : RS232, RS485/RS422 (2 in 1)			
	COM2 : RS485			
	COM3 : RS485			
Digital I / O	2 inputs with optocoupler isolation; 2 relay outputs			
Ethernet Port	3 Ethernet ports (2*LAN+1*WAN)			
WIFI Module	N/A	N/A	N/A	YES
Power Supply	24VDC (12~28VDC)			
Power Consumption	<10w			
Enclosure	PC+ABS			
Dimension (W*H*D)	131.0mm*100.5mm*46.0mm			
Weight (KG)	0.3			
Vibration Resistance	10~25Hz (X, Y, Z direction 2G/30 minutes)			
Storage Temperature	-20°C~70°C			
Working Temperature	-10°C~60°C			
Relative Humidity	10~85% RH (Non-condensing)			
CE Certification	CE Marked			
FCC Certification	FCC Class A			
HTTP Interface	Yes			
Remote Update	Yes			
Configuration Backup	Yes			
Off-line Transmission	Yes			
GPS	N/A	LBS	LBS	N/A

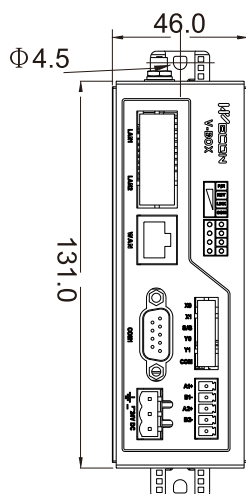

(Din rail)

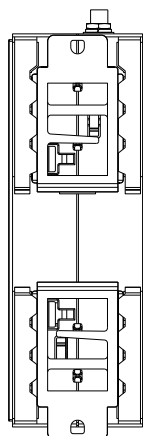

(Screw mount)

